

# XTREME BOATS

LIGHTER, STRONGER, FASTER  
FOR THE HIGHEST PERFORMANCE

## TOTAL PERFORMANCE REPORT

WWW.XTREMEBOATS.COM

850-547-9500

### TEST DAY DATA

Test Date	Apr-12
Test Conductor(s)	BSH
Boat Weight As Tested	1345
Air Temperature	85
Elevation	160
Wind Velocity	5
Fresh/Salt Water	Fresh
Weight of Persons during Test	220




### PERFORMANCE SUMMARY

Top Speed (MPH @ RPM)	35.3
Acceleration 0 - 10 MPH (Seconds)	N/A
Acceleration 0 - 20 MPH (Seconds)	N/A
Best Fuel Efficiency (MPG @ MPH)	N/A

### ENGINE SPECIFICATIONS

Engine	Mercury 40	ELPT
Horsepower	40	
Cylinders	3	
Gear Ratio	2.00	

### PERFORMANCE CURVE

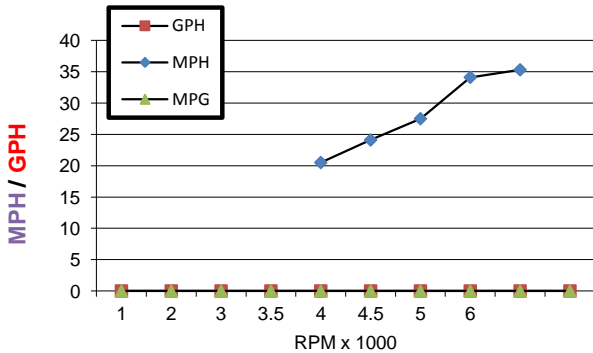

### BOAT SPECIFICATIONS

Boat Model	Brute 1654 SS
Bottom Style	Modified V w Vented Keels
Material	Welded Aluminum
Length	16'0"
Beam	72"
Bottom Width	54"
Hull Bottom Thickness	0.125" Aluminum (1/8")
Max HP Capacity	60HP
Fuel Tank	Topside
Steering Type	Stick Steering
Dry Boat Weight	595
Transom Height	22"

### PERFORMANCE DATA

RPM x 1000	SPEED MPH	FUEL GPH	FUEL MPG
1		N/A	N/A
2		N/A	N/A
3		N/A	N/A
3.5		N/A	N/A
4	20.5	N/A	N/A
4.5	24.1	N/A	N/A
5	27.5	N/A	N/A
6	34.1	N/A	N/A
6.1	35.3	N/A	N/A
		N/A	N/A

### PROPELLER SPECIFICATIONS

Brand	Mercury
Model	Vengeance
Material	SS
Diameter/Pitch	10.38/13
Number of Blades	3

### Performance Calculations

Propeller Slippage at WOT	5.99%
Hull Factor (Efficiency)	204.69
Higher = More Efficient	

Xtreme Industries 1326 Old Ridge Road Bonifay, FL 32425

Results on individual boats may vary depending on many factors, including weather and the condition of propeller, lower unit and boat bottom.

850-547-9500 XtremeBoats.com